



Select Fabricators, Inc.


EMI/RFI Shielded Portable Enclosures Mini-Enclosures

Patent Pending

- ◆ Tabletop Applications
- ◆ Portable Shielding

Standard Configuration:

- Single or Double wall EMI shielding tent
- Size Range: 15" x 18" x 11.5" to 4' x 4' x 4' (38cm x 46cm x 29cm to 1.12m x 1.12m x 1.12m).
- Constructed with RoHS compliant, durable, lightweight Silver/Copper/Nickel fabric. Nova Select, a US made flexible material, has average shielding effectiveness of -85dB in the range of 30 MHz to 1 GHz and an average -80 dB in the range of 1 GHz to 11 GHz, eliminates stress cracking concerns, and is coated to provide protection against galvanic corrosion.
- Patent Pending Roll-up design door with hook 'n loop tabs at the top to keep door open
- Floor is constructed of EMI shielding fabric between two layers of heavy duty tarp.
- Quick-to-assemble aluminum frame
- Cable I/O Sleeve

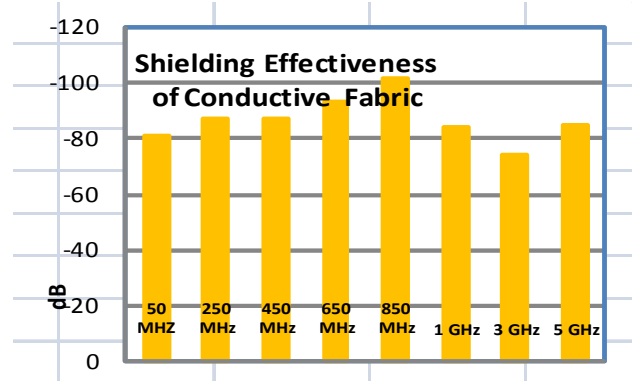

Options:



- Ventilation: two RF Shielded Honeycomb Vents with Fan and Stand Unit that mounts to intake vent.
- RF Filter/Ground box attaches to cable I/O sleeve. Filters power line.

Optional filtering for Ethernet and USB is available.

- RF Absorbent foam lining to reduce internal reflections.

Industries Served	Technology Sectors
Commercial Wireless	Wireless Device Testing
Industrial Wireless	802.11a/b/g/n Commercial - Enterprise, WLAN, WiFi
Automotive	3G, 4G, LTE, Cellular
Aerospace & Defense	LF / UHF RFID
Cellular Forensics	Military Communications
Computer Forensics	Secure Communications / SCIF
	WiMax
	EMC Pre-compliance
	Medical equipment shielding



Select Fabricators, Inc.

+1.888.599.6113 Fax: +1.585.393.1378

10/12/10

©2010 Select Fabricators, Inc.

Products for this millennium

eMail: contactus@select-fabricators.com

www.select-fabricators.com